

IN THE UNITED STATES PATENT
AND TRADEMARK OFFICE

JC542 U.S. PTO

09/204866



12/03/98

Docket No.: PA1.615

Express Mail No.: EH892104142US

In re Patent of

JOHNSON, GARY

I hereby certify that this correspondence
is being deposited with the United States
Postal Service as EXPRESS Mail Service
to addressee service under 37 CFR 1.10,
postage paid, on the date indicated and
is addressed to:

Assistant Commissioner for Patents
Washington DC 20231
on 3 Dec. 1998

For: Patent Application for POWERED CUTTING SURFACE WITH PROTECTIVE
GUARD FOR EQUINE TEETH



JOHN E. HALAMKA

Dated: 3 Dec. 1998

Torrance, Los Angeles County
California

UNITED STATES POSTAL SERVICE EXPRESS MAIL FILING

Express No. EH892104142US

Identification no. PA1.615

The commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 08-0207. A duplicate copy of this sheet is enclosed.


☐ Check No. _____ in the amount of \$645.00 for
ISSUE FEE enclosed.

☒ The filing fee for filing this application with 2 independent claims
and 27 dependent claims as authorized by 37 CFR.

☒ Any additional fees under 37 CFR.

☒ Any processing fees under 37 CFR.

Respectfully submitted,

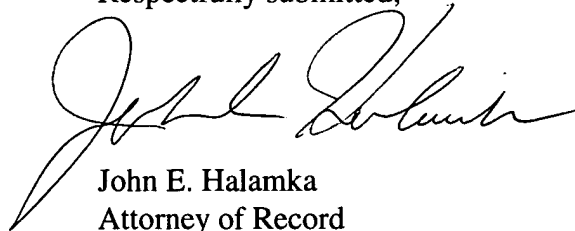

John E. Halamka
Attorney of Record
21515 Hawthorne Blvd.
Suite 590
Torrance, CA 90503
310-316-6100

POWERED CUTTING SURFACE WITH PROTECTIVE GUARD FOR EQUINE TEETH

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

This invention relates to the art of tooth maintenance for large animals and more particularly to a set of tools which may be used under powered motion for care and maintenance such as removing a selected portion of the exposed surface of teeth, such as equine teeth, with the powered hand being guided into the mouth of the horse. The powered tool is partially guarded so as to protect fleshy portions of the horse's mouth from being engaged by the powered tool. The tool may have a rotary cutting surface of a selected size and shape, sometimes commonly called a burr, or the tool may be a rotary cut-off disk. The selected tool, either the burr or cut-off disk, is supported and partially enclosed in a protective guard formed as a hand piece that may be guided into the mouth of a horse to perform care and maintenance on a selected portion of the teeth. The hand piece fabricated according to the teaching of this invention provides for quick on and off attachment of a selected cutting surface for maintenance of a preselected portion of teeth within the same hand piece or another hand piece sized to ease access to the next selected portion of the horse's mouth. The selected cutting surface is mounted within the protective guard/hand piece arrangement that may further incorporate a vacuum channel whereby the tooth dust and debris created by the powered cutting surface removing a portion of tooth is sucked out of the mouth of the horse. The motion of the tooth surface removal tool may be changed from rotary to powered reciprocating motion for a selected portion of the teeth. Attaching the powered drive to the rotary cutting surface by means of an adjustable clutch further enhances protection from injury to the inside of the mouth of the horse.

1 DESCRIPTION OF THE PRIOR ART

2 Throughout the life of the horse, the teeth continue to
3 extend from the gums. When non-domesticated horses graze on the
4 ground, they pick up sand and hard particles in the grass, which would
5 naturally reduce the growth of the horse's teeth.

6 In order for domesticated horses to properly chew their food,
7 which consists mostly of preprocessed grain and formula, the teeth
8 require periodic maintenance. Without the natural wearing of the teeth
9 from grazing on the ground, the teeth may grow uneven and too long,
10 thus interfering with normal eating.

11 In the past, regular dental care to remove points, hooks or
12 ridges that have grown or worn into the teeth required the use of a
13 specially designed rasp-like tool to remove them, a process called floating
14 the teeth. Because of the structure of the teeth, the horse does not have
15 nerves extending upward in the teeth and therefore feels no pain when
16 the teeth are filed to reshape them.

17 A grown horse uses 36 teeth to eat. The 6 upper incisors
18 and the 6 lower incisors are for shearing grass and leaves, which are
19 masticated by 12 premolars, and 12 molars located on both sides of the
20 upper and lower jaws. These molars must align for the horse to chew
21 properly.

22 The majority of dental problems are associated with the
23 molars and premolars. However, if the incisors are too long, opposing
24 molars and premolars may be prevented from engaging properly.

25 In the prior art, hand tools similar to metal files or rasps
26 were used to remove a selected portion of the tooth surface. These tools
27 consisted of several shaped handles with pads mounted on one end.
28 The pads accepted plates having an abrasive or specially designed file or
29 rasp-toothed surface selected by the user. The mounted abrasive or
30 rasp on the handle was then inserted into the horse's mouth and

1 positioned against the tooth structure that needed to be altered. The
2 user then manually applied pressure and movement to the handle until
3 the selected portion of the tooth structure was removed.

4 Some prior solutions to the problem were to add motor
5 power to the burrs to provide a "power dental tool" to replace the manual
6 rasps. These solutions ease the manual work but introduced other
7 problems such as the uncontrolled creation of dust and debris as well as
8 the danger of injury to the horse and user from exposed high speed
9 reciprocating or rotary burrs or rasps which may engage soft tissue such
10 as the cheek, tongue, or gums inside the horses mouth.

11 Thus, there has long been a need for an arrangement that
12 allows the user, usually a veterinarian, an owner or an equine dentist, to
13 easily perform the removal of preselected material from the exposed
14 surface of the horse's teeth without danger to the horse or the person
15 doing the job.

16 It is desired that the arrangement allow the user to access
17 the full array of teeth with a set of preselected shaped and surfaced files,
18 rasps or other tools such as diamond cut-off blades.

19 It is further desired that the arrangement be motor driven
20 but provide safety to the user and horse.

21 It is further desired to provide preselected shaped covers or
22 guards around selected portions of the rotary tool to allow the system to
23 be used in all parts of the mouth of the horse.

24 It is further desired to provide a clutch between the motor
25 and the rotary tool. The threshold of disengagement of the rotary power
26 applied by means of the clutch may be adjustable with access for
27 adjustment that does not require dismantling the system.

28 It is further desired that the arrangement be able to remove
29 accumulation of debris from the inside of the horse's mouth during the
30 procedure.

1 It is desired that a simple latching or unlatching movement
2 engage and disengage the selected tool within the rotary driven
3 arrangement.

4 It is desired that a simple latching or unlatching movement
5 engage and disengage selected guards around the rotary tool.

6 It is further desired that during the operation of the
7 arrangement for the removal of material from inside the mouth the
8 inadvertent engagement of soft tissue inside the mouth not adversely
9 affect the user or the horse.

10 It is desired that reconfiguration of the arrangement be
11 accomplished even if the users hands are slippery.

12 It is further desired that the motor be separated from the
13 rotary tool by a drive train so that the user need not support the weight
14 of the motor during the procedure.

15 It is further desired that the arrangement be easily adapted
16 to a "power dental tool" motor or handle the user may presently own.

17 SUMMARY OF THE INVENTION

18 Accordingly, it is an object of the present invention to
19 provide an arrangement that allows the user to safely and easily perform
20 a dental procedure of removal of preselected material from the exposed
21 surface of the teeth of horses.

22 It is another object of the present invention to provide an
23 array of preselected size, shape and surfaced tools to be used to remove
24 the tooth material as well as a means for quickly changing the rotary tool
25 selected and provide a guard around a selected portion of the rotary tool
26 so that it does not engage the flesh inside the mouth of the horse.

27 It is an object of the present invention to provide a
28 clutch arrangement which allows the user to initially adjust the
29 threshold at which the rotary motion will disengage should the rotary
30 tool inadvertently entangle flesh inside the mouth of the horse. It is a

1 further object that said threshold may be easily changed as the
2 procedure progresses among various portions of the mouth without
3 dismantling the system.

4 It is another object of the present invention to provide a
5 method of removal of the tooth material debris from inside of mouth of
6 the horse without stopping or interfering with the progress of the
7 procedure.

8 It is yet another object of the present invention to provide an
9 arrangement which does not require the user to support the motor
10 during the procedure.

11 It is yet another object of the present invention to be easily
12 mountable on or at least partially adapted to a "power dental tool" which
13 may be currently owned by the user.

14 The above and other objects of the present invention are achieved,
15 according to a preferred embodiment thereof, by providing a system of
16 an improved power tool arrangement of a motor, power train, tools that
17 remove tooth material, rotary tool hand pieces which support the tools
18 for rotary motion or reciprocating motion and provide a guard to
19 separate the tool from soft tissue. The arrangement is provided with
20 means to easily reconfigure the tool, tool support and guard to adapt the
21 system for powered removal of preselected portions of teeth.

22 MOTOR

23 The power for the preferred arrangement may be supplied
24 from a preselected off the shelf rotary hand tool that may be obtained in
25 various configurations of torque and adjustable rpm under the
26 trademarks DREMEL or SUHNER. Each motor is designed to accept the
27 shaft of a tool with an arrangement of a collet. The tool may have a
28 selected cutting surface and a selected length of shaft. The rotary hand
29 tool may be enhanced with a flexible shaft, one end adaptively
30 mountable on the rotating shaft of the motor and the remote end

1 attachable to an optional handle whereby under the condition of the
2 rotary tool being mounted on the handle, the user may perform work by
3 directing the rotary tool remote from the motor without having to
4 support the weight of the motor. The motor may be supported within a
5 backpack, fannypack or sling arrangement worn by the user.

6 POWER TRAIN

7 The flexible shaft that may be mounted between the motor
8 and the tool removes the burden of holding the motor and physically
9 separates the motor from the tool thereby diminishing the level of sound
10 of the arrangement that may be disturbing to the horse. One end of the
11 flexible shaft may incorporate an adapter for quick push on connection
12 with the selected motor, the end attachable to the hand piece may be
13 fabricated with a stainless steel sleeve and shaped to incorporate a catch
14 engagable with a latch mounted on the hand piece. The length of the
15 flexible shaft may be selected to provide easy movement of the end of the
16 shaft remote from the motor.

17 However, the flexible shaft arrangements provide direct
18 coupling between the motor and the rotary tool. Should the tool engage
19 a portion of the soft flesh inside the mouth of the horse or bind against
20 the surface of the teeth, the rotational energy of this direct connection
21 may cause damage to the horse before the tool can be removed or the
22 power disconnected from the motor. In the present invention an adapter
23 is provided between the motor and the flexible shaft. An adjustable
24 clutch is mounted within the adapter to be accessible to the user to
25 adjust the threshold of torque transmitted between the motor and the
26 flexible shaft of the power train. Should the tool bind, as soon as the
27 selected threshold is exceeded, the movement of the power train is
28 interrupted so that the user may safely disengage the tool or clear the
29 obstruction thereby providing protection to the horse and user of the
30 arrangement.

TOOL

It is possible to obtain off the shelf tools to which rotary motion is applied. The tool is mountable in the motor and generally consists of a shaft and a working surface mounted on the end of the shaft. The shaft is nominally no longer than 1 to 2 1/2 inches. The working surface is provided in an array of shapes, sizes and surfaces. Some of the preferred shapes include a sphere, cone, cylinder, and combinations such as cylinder topped by a half sphere. These tools may be commonly called a burr. The cutting surface formed in the tool may be a preselected pattern of raised rasp like teeth of a preselected size and shape which removes tooth material without binding, bouncing or filling the rasp like teeth with debris.

Another type of rotary tool is the cut-off disk which is a platter about the size of a quarter covered with diamond dust and mounted on a shaft. This disk may be used edge on to cut off a selected portion of a tooth rather than grind off the portion with a burr. The edge of the disk may also be used to score the selected portion of tooth so that portion may be chipped off. The flat surface of the disk may be used as a polishing tool or may be used to round off any sharp edges like a disk sander.

If a tool having a working surface is mounted within a collet either on the end of the motor or on the end of the handle attached to the motor or end of a flexible drive shaft and the rotary tool has a shaft length of more than approximately 2 1/2 inches, the operation of this configuration of an extended cutting surface rotating at high speed and fully exposed, may be dangerous to the user and to the work piece, in this case the mouth of a horse. The mouth of a horse is deep and requires a tool of at least 12 inches in length to adequately reach the exposed surface of the back molars.

1 GUARD (Safety shield/hand piece) AND ROTORY TOOL
2 SUPPORT (with vacuum channel)

3 A guard in the form of an encircling shield may be installed
4 around the tool's shaft and cutting surface to separate the user and
5 portions of the horse's mouth from the tool which is in rotary motion.
6 The guard should be fabricated to have a minimal opening to allow only
7 a selected portion of the cutting surface to be exposed. The hand piece,
8 mountable on the end of the motor or flexible shaft, may be fabricated to
9 incorporate the guard in a manner that allows the tool to be mounted
10 within a channel of the hand piece thereby supporting the shaft and
11 encircling the cutting surface. Support of the shaft is generally required
12 if the shaft of the tool is longer than approximately 4 inches in order to
13 reach into all areas of the mouth of the horse, pressing the cutting
14 surface onto the surface of the tooth may move the shaft and or cutting
15 surface against the safety shield or channel of the handpiece. Bearings
16 may be mounted at preselected positions along the channel to support
17 and protect the rotating shaft and cutting surface under conditions of
18 engaging the channel or guard surfaces.

19 The hand piece may be supplied as a set of selected lengths
20 specially adapted to service a selected portion of the horse's mouth. A 6
21 to 8 inch hand piece may be used to service the incisors. A 12 to 14
22 inch handpiece may be used for the back molars. An 8 to 12 hand piece
23 may be supplied for intermediate service whereas a 10-inch hand piece
24 is the recommended length for an all around arrangement.

25 The hand piece may include a second channel partially
26 separate from the rotary tool channel. The hand piece may be
27 fabricated to form an orifice near the cutting surface whereby the orifice
28 is in communication with the second channel. The end of the second
29 channel remote from the cutting surface is attachable to a vacuum
30 source such as a "SHOP VAC" ® whereby tooth material removed by the

1 cutting surface may be sucked out of the mouth of the horse along the
2 second channel without having to remove the hand piece from the
3 mouth of the horse.

4 The hand piece may also incorporate appropriate gearing
5 and joints to transpose the rotary motion of the motor and apply a
6 reciprocating motion to the tool mounted on hand piece. The
7 reciprocating tool usually contains a textured surface to remove tooth
8 material especially from the rear most molars which so abuts the gum of
9 the horse that the use of a rotating tool even with a guard may cause
10 injury to the gum.

11 In the preferred embodiment, the incorporation of an
12 adjustable clutch within the power train, mounting of at least one
13 support bearing within the handpiece, mounting the rotary tool with a
14 guard and further providing for the mounting of shaped guard
15 extensions on the surface of the guard provides a quick reconfiguration
16 of the arrangement during the procedure that provides care and
17 maintenance for the entire set of teeth.

18 An adapter may be provided to allow the user to use at least
19 a portion of the arrangement such as the tool handpiece and guard
20 system with a power dental device already owned by the user.

21 BRIEF DESCRIPTION OF THE DRAWINGS

22 The above and other embodiments of the present invention
23 may be more fully understood from the following detailed description,
24 taken together with the accompanying drawings, wherein similar
25 reference characters refer to similar elements throughout, and in which:

26 Figure 1A, B, C, D and E are front views of the present
27 invention;

28 Figure 2 is a front view of a bearing support;

29 Figure 3 is a front view of another bearing support;

1 Figure 4 A, B, C, and D are views and a cross section of the
2 present invention;

3 Figure 5 A, B, and ^C~~D~~ are views of another embodiment of the
4 present invention;

5 Figure 6 B and F are views of another embodiment of the
6 present invention, Figure 6 H is a view of the hose;

7 Figure 7 B and F are views of a flange;

8 Figure 8 is a cross sectional view of the present invention;

9 Figure 9 is a cross sectional view of the present invention;

10 Figure 10 is a front view of the bearing support;

11 Figure 11 is a view of another embodiment of the present
12 invention, Figure 11 E is a view of the extended shaft;

13 Figure 12 F, B, S and A, B, C are views of another
14 embodiment of the present invention ;

15 Figure 13 is a view of an attachable handle;

16 Figure 14 A and B are views of other embodiments of the
17 present invention;

18 Figure 15 is a detailed view of Figure 14 A;

19 Figure 16 is a schematic of the power train;

20 Figure 17 is a view of the clutch arrangement; and

21 Figure 18 is a view of the flexible shaft sleeve.

22 DESCRIPTION OF A PREFERRED EMBODIMENT

23 Referring now to the drawing, there is illustrated in Figures
24 1A through 1E an embodiment of an arrangement fabricated according
25 to the teaching of the present invention and generally designated 10.
26 Figure 1A illustrates a rotary tool support generally designated 301
27 mountable within a hand piece generally designated 401. The hand
28 piece 401 is fabricated to form a guard around a selected portion of the
29 cutting surface 302. This embodiment is adapted to be attachable to a

1 motor directly or by means of a flexible shaft and/or a handle that the
2 user may own.

3 The rotary tool support 301 illustrated in Figure 1A is
4 fabricated to support the shaft 303 of the rotary tool with a cutting
5 surface 302 mounted on the shaft 303, even if a long shaft 303 (greater
6 than 6 inches) is used.

7 Now referring to Figure 1C, the hand piece 401 fabricated
8 according to the principals of the present invention incorporates the
9 base 403 which may be fabricated to adapt the arrangement to a
10 powered rotating source, such as a flexible shaft which is engageable with
11 the shaft 303, or be mountable directly on the end of a powered rotating
12 source already owned by the user. The end of the hand piece 401
13 remote from the powered rotating source is fabricated as a guard
14 encircling a selected portion of the cutting surface 302 and may accept
15 the mounting of an extended guard 406. The long shaft 303 of the
16 rotary tool is required so that the arrangement may be used to reach
17 even the rear most teeth within the mouth of the horse. The shape of
18 the extended guard 406 may be selected to protect a particular portion of
19 the horse's mouth and thus may form a set of removable attachable
20 guards.

21 Now referring to Figure 1 A, there is illustrated a rotary tool
22 support generally designated 301. The rotary tool mounted with the
23 support 301 has a cutting surface 302 mounted on a shaft 303, this
24 illustrated combination is commonly known as a burr. The shaft 303
25 extends along a bearing support sleeve 304. In the preferred
26 embodiment, a bearing 305 is press fit into the end of the sleeve 304
27 nearest the cutting surface 302. An upper shaft seal 306 is mounted
28 above the bearing 305. A lower shaft seal 307 may be mounted on the
29 end of the shaft 303 remote from the cutting surface 302 to protect the

1 bearing 305 from contamination. Figure 1 B shows the rotary tool
2 support 301 fully assembled.

3 Figure 1 C illustrates a hand piece generally designated 401.
4 An outer shell fabricated of a capped tube 402 is mounted into an
5 adaptive base 403 having a plurality of setscrews 405 depicted as an
6 upper pair 405U and a lower pair 405L. The diameter of the tube 402 is
7 selected to be a snug fit for the fully assembled rotary tool support 301
8 but allow the tool support 301 to be easily inserted into or removed from
9 the tube 402. A selected upper portion of the tube 402 is removed down
10 to the lower edge 404 to form an opening and expose a selected portion
11 of the cutting surface 302. The remainder of the outer shell capped tube
12 402 forms a shield around the cutting surface 302. If more protection is
13 desired an external guard 406 of preselected shape may be slid over the
14 end of the tube 402 and secured in place with a set screw 405. The
15 shape of the external guard 406 is selected so as to not come into
16 contact with the cutting surface 302. Walls 407 form an opening in the
17 external guard 406 to expose a preselected portion of the cutting surface
18 302.

19 Figure 1 D illustrates the rotary tool support 301 fully
20 inserted into the hand piece 401 and secured lightly therein by the
21 upper pair of setscrews 405U. The end of the shaft 303 remote from the
22 cutting surface 302 is mounted into the collet 202. In this embodiment,
23 the collet 202 is mounted on the end of a flexible shaft handle 203,
24 which may be mounted to a motor. The adaptive base 403 is installed
25 over the flexible shaft handle 203 and tightly secured in place by the
26 lower pair of setscrews 405L followed by tightening the upper pair of set
27 screws 405U. Figure 1 E shows the exposed portion of the cutting
28 surface 302 surrounded by the hand piece 401 and external guard 406
29 fully assembled.

1 The external guard 406 may be fabricated with second wall
2 409 forming an intake orifice 410 at a preselected position near the
3 cutting surface 302. A vacuum channel 408, which in the preferred
4 embodiment is a hollow tube, may be mounted or fabricated within the
5 external guard 406, positioned essentially parallel to the handpiece 401
6 and in communication with the orifice 410. As the channel 408 has one
7 end making a connection with the intake orifice 401 formed by second
8 wall 409, the channel 408 provides an open passage way for sucking out
9 dust and debris created during use of the cutting surface 302 upon the
10 condition of a vacuum source attached to the end of channel 408 remote
11 from the intake orifice 410.

12 In Figure 2 there is illustrated another embodiment of the
13 rotary tool support 301 fabricated as above with the addition of a lower
14 bearing 308 mounted within the bearing support sleeve 304 above the
15 lower shaft seal 307. However, when the shaft 303 in such a multiple
16 bearing arrangement is mounted within the collet 202 of the flexible
17 shaft handle 203, should the flexible shaft handle 203 also be fabricated
18 with a multiple bearing arrangement, a misalignment of the bearings of
19 the flexible shaft handle 203 and the bearings supporting shaft 303 may
20 occur to cause excessive wear on one or more of the bearings or may
21 cause the arrangement to bind and not be smoothly rotatable by the
22 motor. This binding may be overcome by providing a means to adjust
23 the alignment of the bearings.

24 If the lower bearing 308 and external seal 307 are removed
25 to overcome any binding problem then another problem may develop.
26 During use of the arrangement, the end of the bearing support sleeve
27 304 remote from the cutting surface 302 may come into contact with the
28 collet 202 causing excessive wear to the point that the collet 202 cannot
29 be loosened for the removal of the shaft 303.

1 Figure 3 illustrates a solution. The use of a lower bearing
2 308 and lower seal 307 can be eliminated and damage to the collet 202
3 be avoided by mounting a hollow brass tube 309 onto the shaft 303.
4 Upon the mounting of the shaft 303 into the collet 202, the end of the
5 brass tube 309 may be positioned to be spaced apart from the collet 202
6 or in contact with the collet 202. However the end of the sleeve 304
7 should not be in contact with the collet 202. The brass tube 309
8 extends from below the upper bearing 305 to a selected distance, 1/16
9 to 1/8 inch, below the end of the bearing support sleeve 304 remote
10 from the upper bearing 305. Upon use of this arrangement, the brass
11 tube 309 performs the function of a bearing by allowing the remote end
12 of the sleeve 304 to come into contact with the brass tube 309 but the
13 brass tube 309 keeps the sleeve 304 separate and apart from the
14 rotating shaft 303.

15 Figure 4 illustrates a specialized handpiece 402 fabricated
16 according to the teachings of this invention to incorporate a first channel
17 for the support for the shaft 303 of the selected rotating tool, a guard
18 partially encircling the tool mounted on the shaft and a second channel
19 which may be attached to a vacuum source. This arrangement generally
20 designated 401 and is fabricated to directly attach to a preferred motor
21 by means of a flexible shaft. The rotating tool illustrated as mounted in
22 the handpiece 402 is a diamond cutoff disk 310 mounted on the end of
23 shaft 303. In the preferred embodiment, the center of the disk is welded
24 to the shaft rather than attached to a shaft by a screw or bolt. This
25 arrangement creates a flat surface on the topside of the disk and is
26 preferred for polishing, as it does not have any high points. The disk
27 310 may be used in this arrangement to slice off a portion of a tooth
28 rather than grind off the portion with a cutting surface known as a burr.
29 The partial cutaway view in Figure 4 B illustrates the end of the shaft
30 303 remote from the disk 310 to be removably insertable within the

1 bearing support sleeve 304 through the bearing 305. The shaft 303
2 may be further protected by a hollow brass tube 309. A connector 311
3 attaches the end of the shaft 303 remote from the disk 310 to an adapter
4 312 which is adapted to slip directly into the end of a motor driven
5 flexible shaft that compatible with the selected motor obtained under the
6 trademark SUHNER. Another preselected shaped adapter 312 may be
7 mounted to the connector 311 to facilitate easy connection to a flexible
8 shaft compatible with the DREMME[®] motor. A latch 413 may be
9 mounted on the handpiece 402 engagable with a catch formed on the
10 end of the flexible shaft to hold the end of the flexible shaft within the
11 hand piece 402. The illustrated hand piece 402 may be re-configured by
12 replacing the cut-off disk 310 with a selected burr (cone, cylinder or ball)
13 and used for care and maintenance, particularly in the front portions of
14 the horse's mouth.

15 A flange 411 may be added to the hand piece 402 to provide
16 room for a second channel that functions as a vacuum channel 408.
17 This second channel is fabricated within the handpiece 402 and flange
18 411. An orifice 410 of a preselected shape may be fabricated in the
19 handpiece 402 near the cutting surface of the rotating tool 310. The
20 vacuum channel 408 is fabricated to have one end in communication
21 with the orifice 410 and the other end adapted to be connected to a
22 vacuum source. The vacuum channel 408 provides a hollow pathway
23 starting from the orifice 410 for the removal of debris through the second
24 channel upon connection to a vacuum source. Some segment of the
25 second channel for the vacuum path and the first channel for the shaft
26 within the shaft support may be in common before being bifurcated.
27 Figure 4 D depicts how the flange 411 is held within the handpiece 402
28 with a snug fitting tongue and groove arrangement 412 and kept in place
29 by a set screw 405. In the preferred embodiment the snug fit eliminates

1 the need for a gasket to maintain sufficient vacuum differential to suck
2 out dust and debris.

Figure 5 depicts a hand piece generally designated 401 fabricated according to the teachings of this invention. The arrangement illustrated in Fig. 5 is shaped and sized for maintenance of the incisor teeth of the horse. The exposed portion of the cutting surface 302 is minimized by fabricating the outer capped top 402 of the handpiece 401 to be close fitting and encircling a large portion of the cutting surface 302. This minimizes the opportunity for the fleshy parts of the horse's mouth to become entangled between the cutting surface 302 and the handpiece 401. The edges 414 of the hand piece 401 below the cutting surface 303 are shaped to provide a smooth slightly curved surface that slips smoothly over the teeth and allows the exposed cutting surface to be forcibly pressed against the selected area of the tooth with minimal, non-interfering contact of the hand piece 401 with the teeth.

The close fitting of the cutting surface to the handpiece 401 is achieved in the preferred embodiment by fabricating the base 415 of the handpiece 401 as illustrated in Figures 6 F and 6 B. In the preferred embodiment, the base 415 is machined of aluminum bar stock to form a rounded cap 416 on one end and access channel 417 open on the other end. Wall 407 is shaped to form an encircling guard around a portion of the cutting surface thereby exposing only a selected portion of the cutting surface near the rounded cap 416. Wall 407 extends away from the rounded cap 416 and toward the access channel 417 to form a first channel for the shaft 303 mounted within the shaft support sleeve 304 as illustrated in Fig 10. This shaft channel is bifurcated below the exposed cutting surface to communicate with a second channel 408, which is part of the vacuum path. Second wall 409 forms an orifice 410 near the cutting surface. A flange mount 418 is formed as shown in Fig. 6 B as a grooved opening wherein the flange 411 may be mounted.

1 The flange 411 illustrated in Figures 7 F and 7 B is a support for a
2 hollow tube 420 one end of the tube 420 communicating with the
3 vacuum channel 408 and the other end extending beyond the flange 411
4 and attachable to a vacuum source. The edges 419 formed around the
5 periphery of the flange 411 are shaped as a tongue surface engagable
6 with the groove formed in the periphery of the flange mount 418 making
7 a snug fitting tongue and groove arrangement 412, snug enough to
8 prevent dissipation of the vacuum pressure so as to not decrease the
9 suction of dust and debris from inside the mouth of the horse passing
10 along the path from the orifice 410 through the vacuum channel 408
11 and hollow tube 420 to the vacuum source, a SHOP VAC ® with
12 appropriate hoses 431 similar to that illustrated in Figure 6 H. The
13 vacuum hoses 431 which join the end of the hollow tube 420 to the
14 vacuum source may be tied to the powered flexible shaft so that as the
15 user moves the hand piece, the line providing the rotational power and
16 the line providing the vacuum source move with the hand piece as a
17 unit.

18 A latch 413 may be mounted in the base 415 at a position to
19 engage a catch mounted on the flexible shaft to secure the flexible shaft
20 with the base 415.

21 Figure 8 is a cross section of the base 415 with flange 411
22 mounted therein by the tongue and groove 412.

23 Figure 9 is a cross section of the base 415 with flange 411
24 installed. A third wall forms a bearing support channel 421 starting
25 near this position and extending in the direction of the rounded cap 416
26 until it intersects with wall 407.

27 Figure 10 illustrates a bearing support sleeve 304 with a
28 bearing 305 and upper shaft seal 306 mounted within one end.

29 To assemble the arrangement, a selected tool comprised of a
30 cutting surface 302 and shaft 303 is inserted through the base 415

1 starting at guard 407 and then into the bearing support channel 421.
2 The bearing support sleeve 304 is then inserted into the bearing support
3 channel 421 engaging the shaft 303 through the bearing 305 so that the
4 shaft 303 extends beyond the end of the bearing support sleeve 304
5 remote from the bearing. The bearing support sleeve 304 is secured in
6 place within the bearing support channel 421 by setscrews 405. Now
7 referring to Figure 5 C, a connector 311 being first mounted to an
8 adapter to a flexible shaft 312, is mounted on the extended end of the
9 shaft 303. The adapter 312 being secured in place by a setscrew 405.

10 Figure 11F illustrates the base 415 of an extended
11 arrangement sized for reaching the rear molars inside the horse's mouth
12 and fabricated according to the teaching of the invention. In the
13 preferred arrangement, the base 415 is 14 inches long. This additional
14 length requires the shaft 303 attached to the cutting surface 302, the
15 bearing support sleeve 304, flange 411, and hollow tube 420 illustrated
16 in Fig. 11, to also be proportionally longer. These items may be extended
17 as illustrated in Figure 11 E. A connector 311 attaches shaft extension
18 313 to the shaft 303 of the cone shaped cutting surface 302.

19 An additional setscrew 405 may be used to secure the longer
20 bearing support sleeve 304. The orifice 410 formed by wall 409 at the
21 front end of the vacuum channel 408 remains similar as it is sized in
22 relationship to the cutting surface 302.

23 Figures 12 F and 12 B illustrate the assembled extended
24 arrangement having a base 415 approximately 14 inches long supporting
25 a rotary tool having a cutting surface 302 and shaft 303 mounted within
26 a bearing support sleeve 304. A connector 311 with adapter to flexible
27 shaft 312 is mounted on the end of the shaft 303 remote from the
28 cutting surface 302.

29 Because the back of the horse mouth is surrounded by
30 fleshy material, the rounded cap 416 of the base 415 may provide

1 inadequate separation between the cutting surface 302 and the fleshy
2 material. An external guard 406 may be mounted on the base 415 to
3 enhance the separation of the fleshy material from the cutting surface
4 302. Posts 422 are mounted near the cutting surface 302. Figures 12
5 A, B and C illustrate three shapes, left, right and balanced, respectively
6 of a type of extended guard 406 which may be removably attached to the
7 base 415 to provide extra separation between the fleshy material and the
8 cutting surface 302. Each extended guard 406 is fabricated with walls
9 423 forming holes engagable with the posts 422. Wall 424 forms an
10 opening to expose the cutting surface 302 and wall 425 forms an
11 opening communicating with the orifice 410. Wall 426 forms a shallow
12 channel in the base 415 into which the lower edge 427 of the extended
13 guard 406 may be inserted. Wall 431 forms a retaining hole in each
14 side of the base 415. A wedge arrangement 428 having an offset head
15 429 and a pin 430 is insertably removable by pin 430 into a selected
16 retaining hole 431 whereby the wedge arrangement 428 is rotated by
17 handle 432 to a position wedging the extended guard 406 securely into
18 place by means of the offset head 429.

19 An attachable handle generally designated 501 is illustrated
20 by Figure 13. This handle may be mounted on the remote end of the 14
21 inch base 415 like a pistol grip to provide a leveraged advantage
22 especially for inserting and guiding the extended arrangement assembled
23 to the rear molars for removing tooth material. This handle incorporates
24 a clamp 502 removably mountable over the end of the base 415 to a
25 position remote from the cap 416. Walls 503 form a threaded hole in the
26 clamp 502 that accepts an extended screw 504 which upon being
27 threaded into threaded hole 503 secures the handle 501 in place as well
28 as preventing movement of clamp 502.

29 Other arrangements that are especially useful for the care of
30 the rear molars is illustrated in Figure 14 A and 14 B. As shown in

1 Figure 15, the base 415 providing support for the shaft 303 within
2 bearing support sleeve 304, all similar to the above embodiments but a
3 set of gears 428 are mounted on the shaft 303 to change the profile of
4 the shaft 303 by ninety degrees. This embodiment is particularly useful
5 with the cut-off disk 310 mounted therein in a position which is
6 essentially horizontal. The cut-off disk can be easily positioned to score
7 a portion of a tooth to be chipped off or used to polish and smooth
8 selected teeth even in the rear portions of the horse's mouth.

9 The arrangement illustrated in Figure 14 B is fabricated
10 according to the above teaching but incorporates a set of gears 428
11 mounted within the base 415. The gears 429 are adapted to change the
12 rotational motion of the shaft 303 to a reciprocating motion. In the
13 preferred embodiment, the reciprocating motion is approximately 1/4
14 inch back and forth. A tool pad 430 is removably attachable to a
15 reciprocating tool handle 429. The tool pad 430 has a flat cutting
16 surface and is particularly useful for the care and maintenance of the
17 rear most molars in the horse's mouth. The hand piece 415 may be
18 pistol shaped to supply leverage and to provide adequate mounting for
19 the set of gears 428 within the hand piece 415 at a point that is not
20 inserted into the mouth of the horse.

21 The units in the preferred embodiment are fabricated of a
22 preselected material such as aluminum, chosen to be lightweight,
23 strong, easily machined and able to function in a wet environment. The
24 surface of the aluminum may be anodized to protect the material from
25 corrosion. A lightweight urethane material is preferred for the slip on
26 extended guard 406 shown in Figure 1 C.

27 Figure 16 is a schematic representation of the power train
28 generally designated 201. The basic configuration is a selected motor
29 101. The tools may be mounted directly onto the shaft of the motor 101
30 or separated from the motor 101 by a flexible shaft 204 as discussed

1 above. Both configurations provide a direct connection between the
2 motor 101 and the cutting surface 302 of the tool. In the preferred
3 embodiment of the power train 201, an adjustable torque clutch 206 is
4 included. Should the preselected torque of the clutch 206 be exceeded
5 during use of the arrangement fabricated according to the teachings of
6 this invention, the clutch 206 will disengage the powered motion of the
7 motor 101 from the tool thereby minimizing possible injury to the horse
8 or user and allow the user to safely clear any obstruction of the
9 arrangement before continuing use.

10 Figure 17 illustrates a clutch 206 having a set of clutch
11 plates 207, a torque adjustment knob 208 that sets the tension between
12 the clutch plates 207. An end adapter 209 compatible with the flexible
13 shaft 204 is mounted on the clutch 206 remote from the motor 101. The
14 clutch 206 is mounted within the collet 202 of the motor 101.

15 A clutch housing 210 is fabricated to slip over the clutch
16 206 and onto the motor 101 to a position whereby the end adapter 209
17 is engagable by the end of the flexible shaft 204 which is mounted within
18 the clutch housing 210. A sliding window 211 may be mounted on the
19 clutch housing 210 to allow easy access by the user to the torque
20 adjustment knob 208.

21 Figure 18 illustrates a collar 212 fabricated from stainless
22 steel and mounted on the flexible shaft 204 remote from the end of the
23 flexible shaft mounted to the clutch housing 210. The collar 212 is
24 fabricated with a catch 213 engagable by the latch 413 mounted on the
25 base 415 of the hand piece 401 when the collar 212 is inserted within
26 access channel 417. The rotational motion of the motor 101 is
27 selectively, interruptably transmitted to the clutch 206, through the
28 flexible shaft 204 engagable with the flexible shaft adapter 312 to the
29 cutting surface 302.

1 Since certain change may be made in the above apparatus
2 without departing from the scope of the invention herein involved, it is
3 intended that all matter contained in the above description, as shown in
4 the accompanying drawing, shall be interpreted in an illustrative, and
5 not a limiting sense.